


ELOÉ™

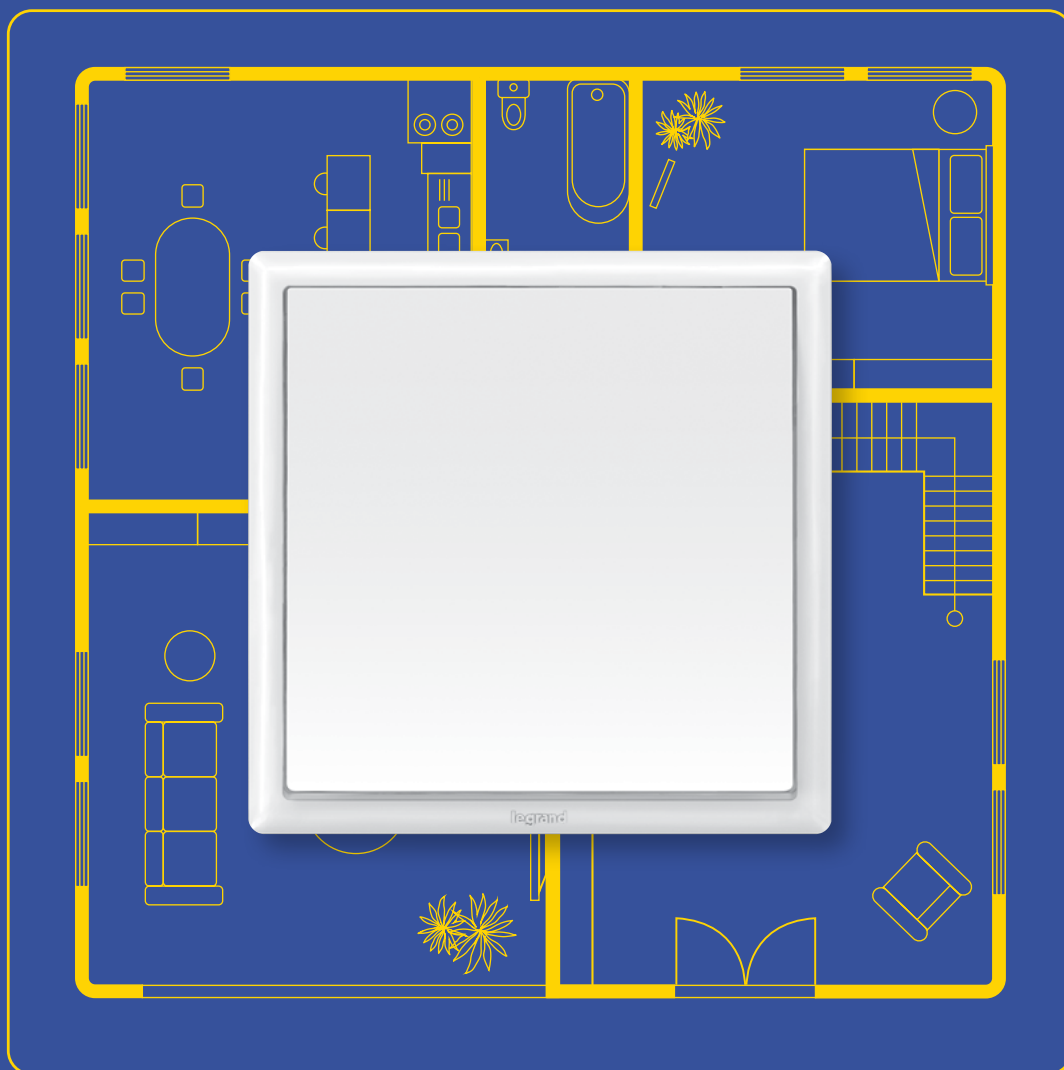

Everything just **ADDS** up

THE **GLOBAL SPECIALIST**
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand®**




When you choose **ELOÉ™** for your project, you are not just choosing a modern design and versatile functions, you are also opting for easy installation – and better value. **ELOÉ™** adds to your winning formula.

CONTENTS

02	ADD DETAILS that matter
04	ADD VALUE to your productivity
06	ADD POSSIBILITIES to projects


08	ADD a touch of COMFORT
10	Catalogue pages

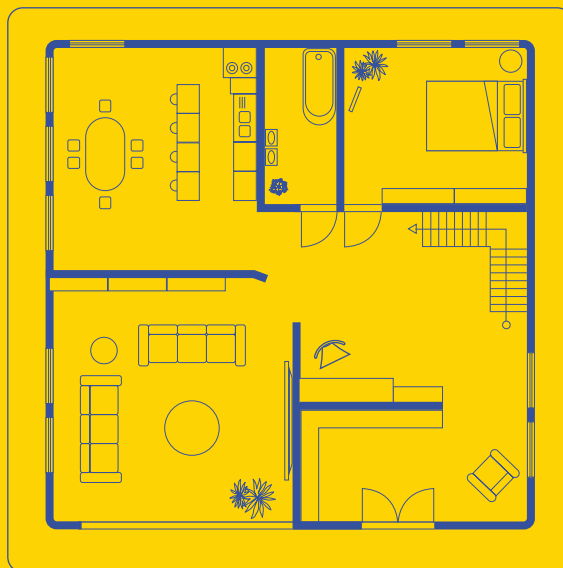

Everything just
ADDS up

ADD DETAILS that matter

Good design doesn't always have to be complex. With **ELOÉ™**, it combines details that make sense and add to the overall experience – for both users and installers.

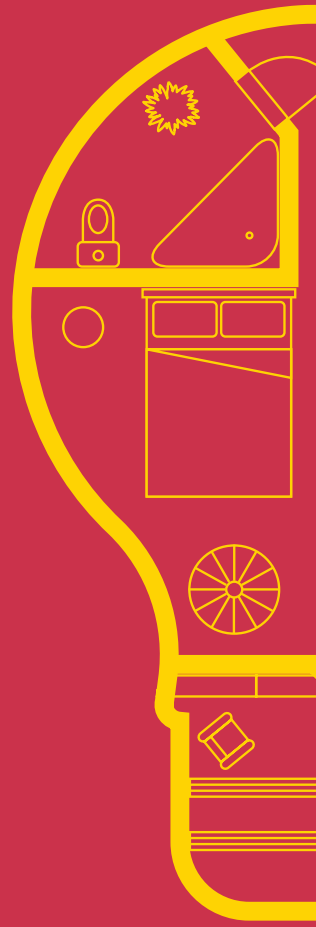

LARGE ROCKER

Ergonomically designed for a great user experience



GLOSSY FINISH

Smooth glossy surface makes cleaning fuss-free.



COMPLIANT WITH STANDARDS

ELOÉ™ is designed to meet international standards – IEC and BS.




SUBTLE CURVES
Rounded corners and curves add a touch of elegance.




STRONG PROFILE
Clean lines and a distinct shape enhance the visual appeal of **ELOÉ™**.



**Superior design
and quality**

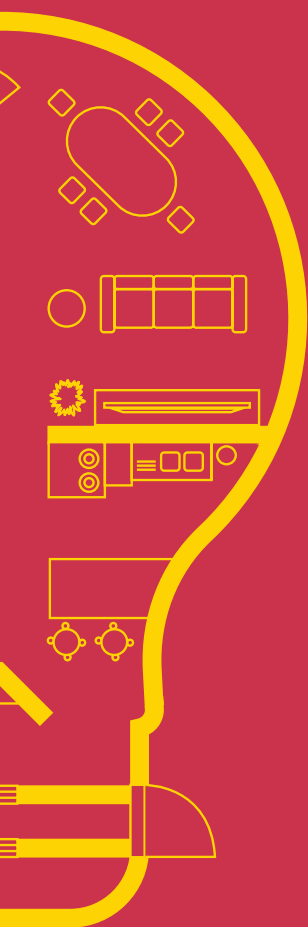


DESIGNED TO LAST
Even the concealed functional parts have been carefully designed.

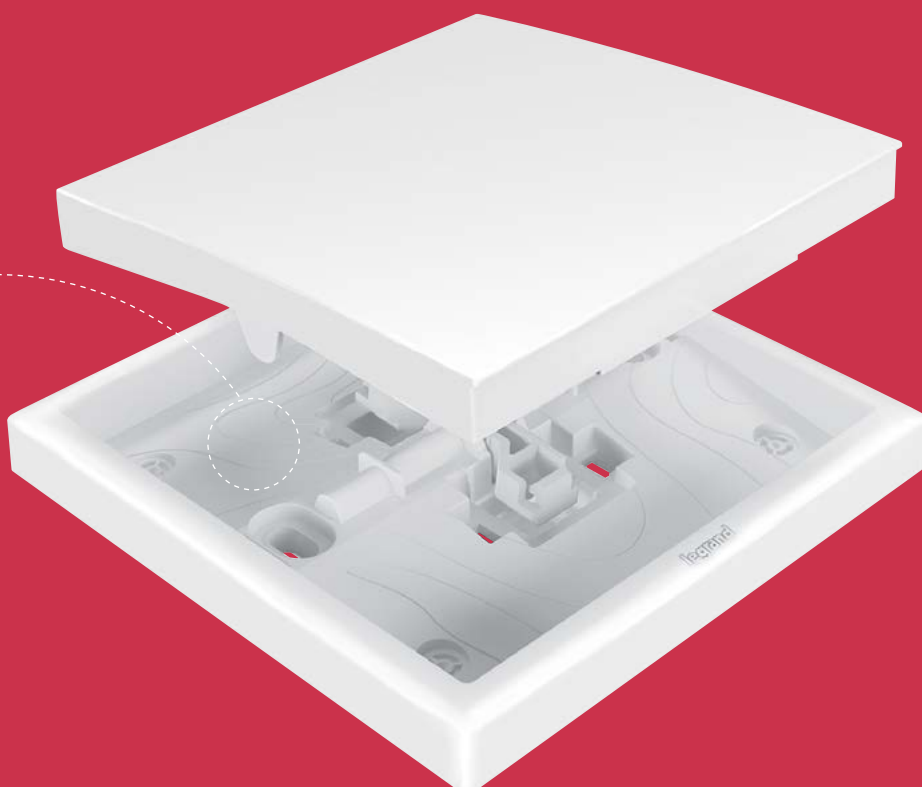

ADD VALUE to your productivity

No matter how unpredictable the conditions at your worksite may be, **ELOÉ™** takes the uncertainty out of your project by making every installation simple, fuss-free, safe, on time – and on budget.

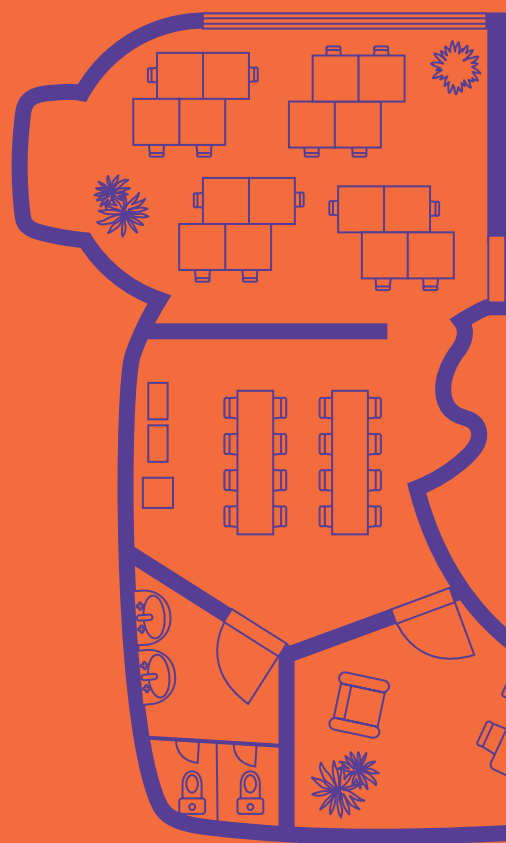

TIME SAVING

Large terminal capacity allows for quick and easy wiring and connection to multiple outlets.




ROBUSTNESS

Ribs make the switch sturdy.



UNIVERSAL SCREW HEADS

For both wiring and adjusting **ELOÉ™**, you need only one screwdriver head to get the installation done.

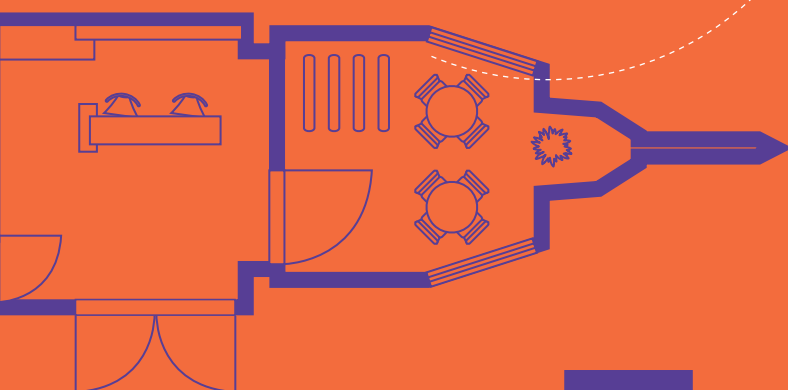

Easy installation



FLEXIBILITY

Oblong shaped holes ensure flexibility for easy adjustment when the switch is not straight.



EASY TO ORDER

1 catalogue number = 1 complete product




SAFE AND FAST INSTALLATION

No access to metal parts ensures your safety during installation. The one-piece plate/mechanism also means that installation can be completed in three simple steps.

ADD POSSIBILITIES to projects

Whether you are working on an integrated development or a straightforward build, **ELOÉ™** provides the functions you need.

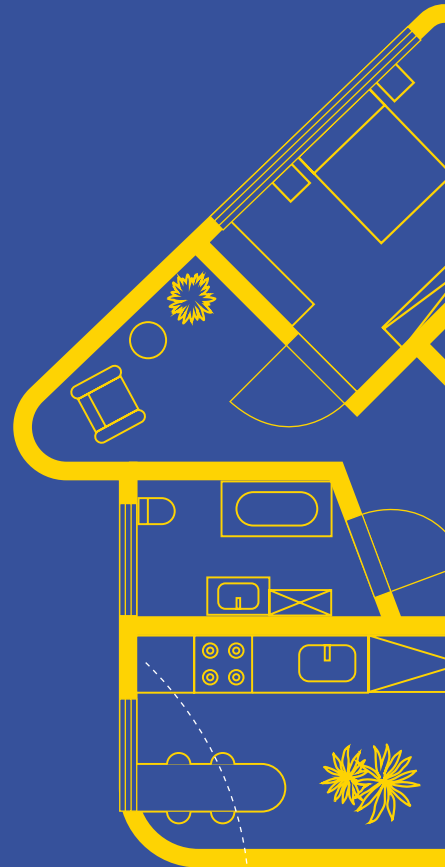

**UNIVERSAL DIMMER SUITABLE
FOR ALL MODERN LOADS**



Dimmable
LEDs



Dimmable
compact
fluorescent lamps



Incandescent
and halogen
lamps



Halogen lamps
with electronic
or ferromagnetic
transformer



4-gang switch



**1-gang British standard
switched 13A socket with
USB Type-A charger**





The splash-proof cover allows a 1-gang **ELOÉ™** mechanism to be installed in outdoor environments. It also ensures protection against dust. With plug engaged, IP55 protection is maintained.


1-gang British standard 13A socket with USB Type-C charger and IP55 cover



Versatility for modern living

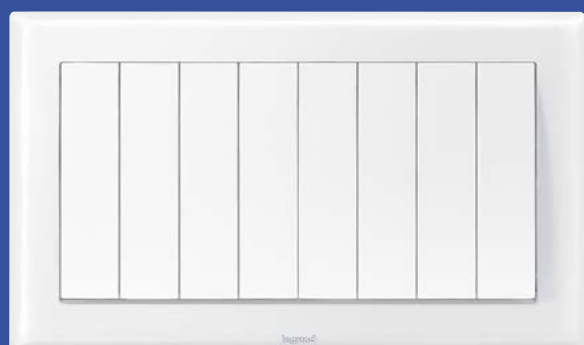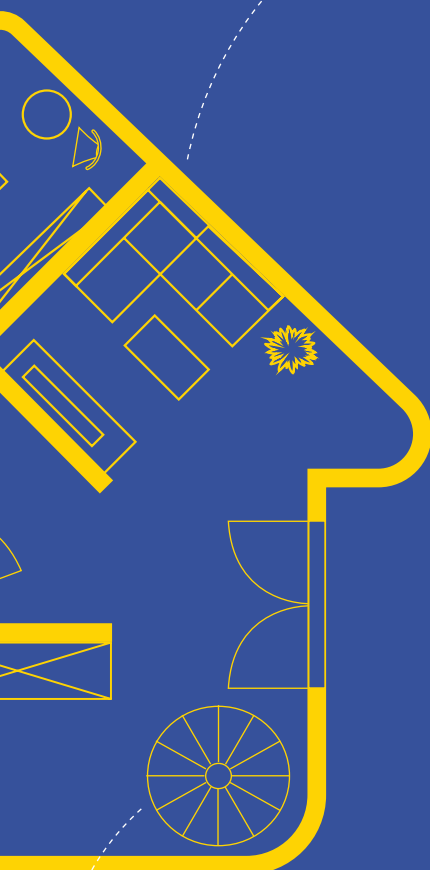

2x4-gang switch in 2-gang box

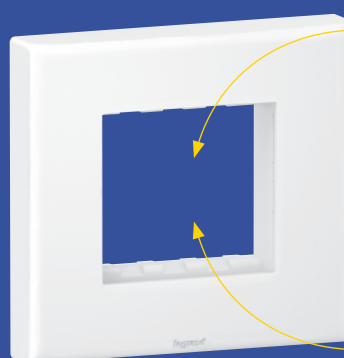

Adapter for Arteor mechanism



Electronic room thermostat



HDMI socket




There is no settling for less. **ELOÉ™** works both independently and with the Arteor range. The Arteor adapter offers versatility for your every need – residential, commercial and hospitality projects.

ADD a touch of **COMFORT**


Comfort is the cornerstone of any hospitality project. That is why the **ELOÉ™** range provides dedicated hospitality functions for enhancing experiences in both guest rooms and shared spaces.



Key card switch

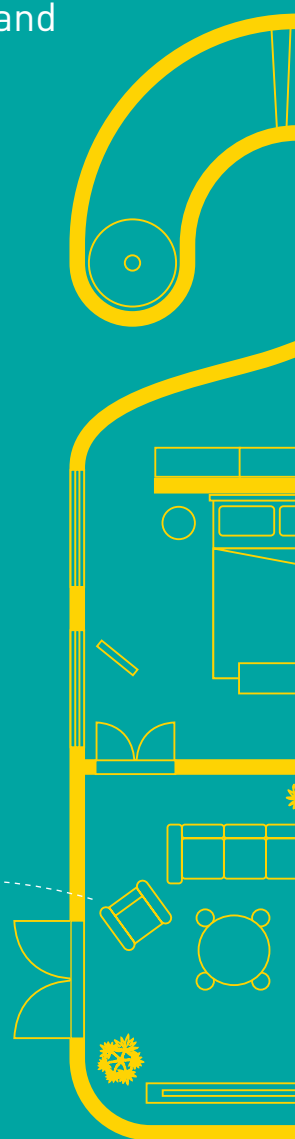

External indicator for
corridor



Internal control unit




Keystone data socket



With this multipurpose socket, you can leave it to **ELOÉ™** to power and charge up your devices while you recharge yourself.

Better hospitality experiences

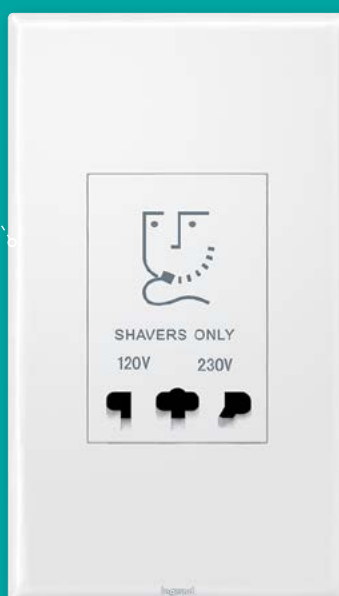

Shaver socket



6 180 01



6 180 05



6 180 07



6 180 11



6 180 16

Conform to BS EN 60669-1

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
10	6 180 00	1-gang 1-way switch ○ White
10	6 180 01	1-gang 2-way switch ○ White
10	6 180 02	2-gang 1-way switch ○ White
10	6 180 03	2-gang 2-way switch ○ White
10	6 180 09	Intermediate switch ○ White
10	6 180 04	3-gang 1-way switch ○ White
10	6 180 05	3-gang 2-way switch ○ White
10	6 180 06	4-gang 1-way switch ○ White
10	6 180 07	4-gang 2-way switch ○ White

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~ (continued)
5	6 180 24	2x2-gang 2-way switch ○ White
5	6 180 66	2x3-gang 1-way switch ○ White
5	6 180 68	2x4-gang 1-way switch ○ White

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~
10	6 180 20	1-gang 1-way switch ○ White
10	6 180 22	2-gang 1-way switch ○ White

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	6 180 10	1-gang ○ White
10	6 180 15	2-gang ○ White
10	6 180 11	Bell push ○ White
10	6 180 16	2-gang for shutters ○ White

ELOÉ™

double pole switches and cooker control unit



6 180 72



6 180 76



6 180 78

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	6 180 70	1-gang 1-way switch + red neon indicator ○ White
10	6 180 71	1-gang 1-way switch + red neon indicator + 1 earth connection ○ White
10	6 180 71 SH	1-gang 2-way switch + red neon indicator + 2 earth connection ○ White
10	6 180 72	1-gang 1-way switch + red neon indicator + 1 earth connection with "Water Heater" marking ○ White
10	6 180 79	1-gang 2-way switch + red neon indicator + 1 earth connection with "Water Heater" marking ○ White

Pack	Cat.Nos	Double pole switches 32 A - 250 V~
10	6 180 74	1-gang 1-way switch + red neon indicator ○ White

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
10	6 180 75	1-gang 1-way switch ○ White
10	6 180 76	1-gang 1-way switch + red neon indicator ○ White
5	6 180 77	2-gang 1-way vertical switch + red neon indicator ○ White
5	6 180 78	Cooker control unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon ○ White



ELOÉ™

dimmers and ventilation control



6 180 35

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang)
Supplied with 2 screws M3.5 for BS boxes

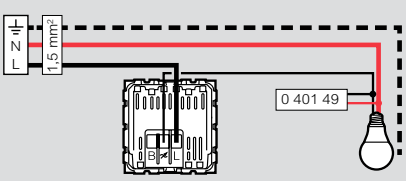Pack	Cat.Nos	Dimmers
1	6 180 31	500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1-gang 2-way : - 60-500W (230 V) for halogen lamps with electronic transformer with leading edge behaviour ○ White 
1	6 180 35	200W LED + 300W Incandescent Rotary dimmer For all types of lamps: - dimmable LEDs: 5 W to 200 W (10 lamps max. 5 W to 37 W (100 V) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (100 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (100 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (100 V) - halogen and incandescent 240 V 5 W to 300 W / 5 W to 150 W (100 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ○ White 
1	0 401 49	Active Power Compensator  Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W 

ELOÉ™

television and telephone sockets



6 180 27



6 180 38



6 180 95

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 180 27	Single TV socket, female ○ White 
10	6 180 26	Single TV socket, F-type ○ White 
10	6 180 38	Double TV socket, female + SAT, F-type ○ White 
5	6 180 32	TV-R-SAT socket ○ White 
10	6 180 97	Telephone sockets RJ 11 socket ○ White 

ELOÉ™

data sockets



6 180 93



6 180 34

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Data sockets
10	6 180 93	RJ 45 Cat.5 UTP ○ White
10	6 180 91	RJ 45 Cat.6 UTP ○ White
10	6 180 92	Double RJ 45 Cat.6 UTP ○ White
10	6 180 17	1-gang - single Keystone adaptor ○ White
10	6 180 34	1-gang - double Keystone adaptor ○ White

ELOÉ™

hotel equipment



6 180 12



6 180 18



6 180 37 + 5 720 78

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 180 12	16 A - 230 V~ - 50/60 Hz Time delay of approx. 30 s after card removal Use card with width max. 54 mm ○ White
10	6 180 13	Hotel bedroom call indicators Enable the resident to inform hotel staff of the room status. 2 settings: - Do not disturb - Make up room External Indicator for corridor Installed in the corridor, displays calls ○ White
10	6 180 14	Internal control unit Installed in the room, allows the user to select the desired setting ○ White
1	6 180 18	Shaver sockets Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep. Spacer delivered to fit in standard box, 35 mm deep 2-gang ○ White
10	6 180 37	Arteor adaptor Allows the integration of 2-module Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc 1-gang ○ White



For integration of Arteor functions, see **Arteor offer**





6 180 41



6 180 41



6 180 57

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang).
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~
		Conform to BS 1363-2
10	6 180 40	1-gang unswitched  ○ White
5	6 180 45	2-gang unswitched  ○ White
10	6 180 43	1-gang double pole switched  ○ White
5	6 180 73	1-gang double pole switched 2 earth terminal  ○ White
5	6 180 48	2-gang double pole switched  ○ White

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~ with USB charger
1	6 180 57	1-gang unswitched with USB Type-A 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W  ○ White
1	6 180 30	1-gang unswitched with USB Type-C 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W  ○ White

ELOÉ™

fused connection units and cable outlets



6 180 82



6 180 85

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack Cat.Nos Fused connection units 13 A

10	6 180 80	Conform to BS 1363-4 Unswitched + cord outlet ○ White
5	6 180 81	Switched + cord outlet ○ White
10	6 180 60	Unswitched + neon + cord outlet ○ White
10	6 180 82	Switched + neon + cord outlet ○ White

Cable outlets

10	6 180 85	Conform to BS 5733 20 A - 250 V~ ○ White
10	6 180 86	45 A - 250 V~ ○ White

ELOÉ™

blanking plates and accessories



6 180 28



6 180 37 + 5 720 72



6 176 36 + 6 180 30

Pack Cat.Nos Blanking plates

10	6 180 28	Conform to IEC 60670-1 1-gang ○ White
10	6 180 39	2-gang ○ White

Arteor adaptor

Allows the integration of 2-module Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc

10	6 180 37	1-gang ○ White
----	----------	--------------------------

Fixing accessories

Splash-proof cover
Mainly for socket protection IP 55 with or without plug engaged
Space inside : 86 x 86 mm
External dimensions : 129,2 x 107,2 x 54,1 mm

4	6 176 36	● Mist grey
---	----------	-------------

Surface-mounting boxes

Conform to BS 5733
Depth 35 mm

8	6 133 50	1-gang ○ White
4	6 133 51	2-gang ○ White



For integration of Arteor functions, see **Arteor offer**





6 180 82



6 180 85

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Fused connection units 13 A
10	6 180 80	Conform to BS 1363-4 Unswitched + cord outlet ○ White
5	6 180 81	Switched + cord outlet ○ White
10	6 180 60	Unswitched + neon + cord outlet ○ White
10	6 180 82	Switched + neon + cord outlet ○ White
10	6 180 85	Cable outlets Conform to BS 5733 20 A - 250 V~ ○ White
10	6 180 86	45 A - 250 V~ ○ White



6 180 28



6 180 37 + 5 720 72



6 176 36 + 6 180 30

Pack	Cat.Nos	Blanking plates
10	6 180 28	Conform to IEC 60670-1 1-gang ○ White
10	6 180 39	2-gang ○ White
10	6 180 37	Arteor adaptor Allows the integration of 2-module Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc 1-gang ○ White
4	6 176 36	Fixing accessories Splash-proof cover Mainly for socket protection IP 55 with or without plug engaged Space inside : 86 x 86 mm External dimensions : 129,2 x 107,2 x 54,1 mm ● Mist grey
8	6 133 50	Surface-mounting boxes Conform to BS 5733 Depth 35 mm 1-gang ○ White
4	6 133 51	2-gang ○ White



For integration of Arteor functions,
see **Arteor offer**



Notes

Riyadh

Localizer Mall , Office No. F6, 1st
Floor.P.O.Box:325099
Prince Muhammad Ibn Abd Al Aziz,
Al Olaya, Riyadh 12222

Al-Khobar

Al-Khobar Mall
2nd Floor, office 362
P.O.Box 927, Al Khobar 31953, KSA
Tel: +966 13 887 89 50
Fax: +966 13 887 89 52



Jeddah (Head Office)

Al-Reem Business Center, 2nd Floor
Al-Rawdah District
P.O.Box:51712
Jeddah, 21553, KSA
Tel: +966 12 261 96 96
Fax: +966 12 261 97 9